



SINGLE-SPLIT WALL MOUNTED TYPE



SRK-ZS-WF

New!



Black & White(-WFB)



Titanium(-WFT)



SRK20ZS-WF, SRK25ZS-WF,
SRK35ZS-WF, SRK50ZS-WF

Pure White(-WF)



BUILT IN
WIRELESS LAN



Wireless
remote control



SRC20ZS-W, SRC25ZS-W2
SRC35ZS-W2



SRC50ZS-W

KEY FEATURES

- Elegant, timeless design, best suited for small to medium sized living spaces.
- Users can choose a colour they like from three different choices.
- Low Global Warming Potential (GWP) and High energy efficiency by new refrigerant R32.
- Quiet Air Flow & Long Reach is achieved by jet technology.
- Colour variation available. Users can choose from three different choices.
- Wireless interface control included.

SPECIFICATIONS

| Indoor unit | | | | SRK20ZS-WF,-WFB,-WFT | SRK25ZS-WF,-WFB,-WFT | SRK35ZS-WF,-WFB,-WFT | SRK50ZS-WF,-WFB,-WFT | |
|---|-----------------|-------------------------|------------------------|---|-----------------------|------------------------|------------------------|--|
| Outdoor unit | | | | SRC20ZS-W | SRC25ZS-W2 | SRC35ZS-W2 | SRC50ZS-W | |
| Power source | | | | 1 Phase, 220 - 240V, 50Hz | | | | |
| Nominal cooling capacity (Min~Max) | | kW | | 2.0(0.9~2.9) | 2.5(0.9~3.1) | 3.5(0.9~4.0) | 5.0(1.3~5.5) | |
| Nominal heating capacity (Min~Max) | | kW | | 2.7(0.9~4.3) | 3.2(0.9~4.5) | 4.0(0.9~5.0) | 5.8(1.3~6.6) | |
| Power consumption | Cooling/Heating | kW | | 0.44 / 0.59 | 0.62 / 0.74 | 0.89 / 0.94 | 1.35 / 1.56 | |
| EER/COP | Cooling/Heating | | | 4.55 / 4.58 | 4.03 / 4.32 | 3.93 / 4.26 | 3.70 / 3.72 | |
| Max. running current | | | A | 9 | 9 | 9 | 14.5 | |
| Sound power level | Indoor | Cooling/Heating | dB(A) | 48 / 50 | 50 / 53 | 54 / 56 | 59 / 60 | |
| | Outdoor | Cooling/Heating | | 56 / 56 | 56 / 58 | 61 / 61 | 61 / 63 | |
| Sound pressure level | Indoor | Cooling (Hi/Me/Lo/Ulo) | | 34 / 25 / 22 / 19 | 36 / 28 / 23 / 19 | 40 / 30 / 26 / 19 | 46 / 36 / 29 / 22 | |
| | Outdoor | Heating (Hi/Me/Lo/Ulo) | | 36 / 29 / 23 / 19 | 39 / 30 / 24 / 19 | 41 / 36 / 25 / 19 | 46 / 37 / 31 / 24 | |
| Air flow | Indoor | Cooling/Heating | m ³ /min | 45 / 45 | 46 / 46 | 50 / 48 | 51 / 52 | |
| | Outdoor | Cooling (Hi/Me/Lo/Ulo) | | 9.3 / 7.0 / 5.9 / 5.0 | 9.9 / 8.0 / 5.9 / 5.0 | 11.3 / 8.7 / 7.0 / 5.0 | 12.1 / 9.9 / 7.4 / 5.9 | |
| Exterior dimensions | Indoor | HeightxWidthxDepth | | mm | 290 x 870 x 230 | | | |
| | Outdoor | HeightxWidthxDepth | | | 540 x 780(+62) x 290 | | 595 x 780(+62) x 290 | |
| Net weight | | Indoor / Outdoor | kg | 9.5 / 31.0 | | 9.5 / 34.5 | | |
| Refrigerant | | Type/GWP | | R32 / 675 | | | | |
| | | Charge | kg/TCO ₂ Eq | 0.62 / 0.419 | | 0.78 / 0.527 | | |
| Refrigerant piping size | | Liquid/Gas | ø mm | 6.35(1/4") / 9.52(3/8") | | | | |
| Refrigerant line (one way) length [chargeless length] | | | m | Max. 20 [15] | | | | |
| Vertical height differences | | Outdoor is higher/lower | m | Max. 10 / Max. 10 | | | | |
| Outdoor operating temperature range | | Cooling | °CDB | -15~46 | | | | |
| | | Heating | | -15~24 | | | | |
| Clean filter | | | | Allergen Clear Filter x 1, Photocatalytic Washable Deodorising Filter x 1 | | | | |

* The data are measured under the following conditions(ISO-T1, H1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.

* Sound level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.

* 'tonne(s) of CO₂ equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.


CONVENIENCE

Wireless Control System



Control your air conditioner from anywhere, anytime

If you turn on the air conditioner when you're on the go, you'll be comfortable when you get home. Even if you forget to turn it off, you can turn it off when you are out and about.

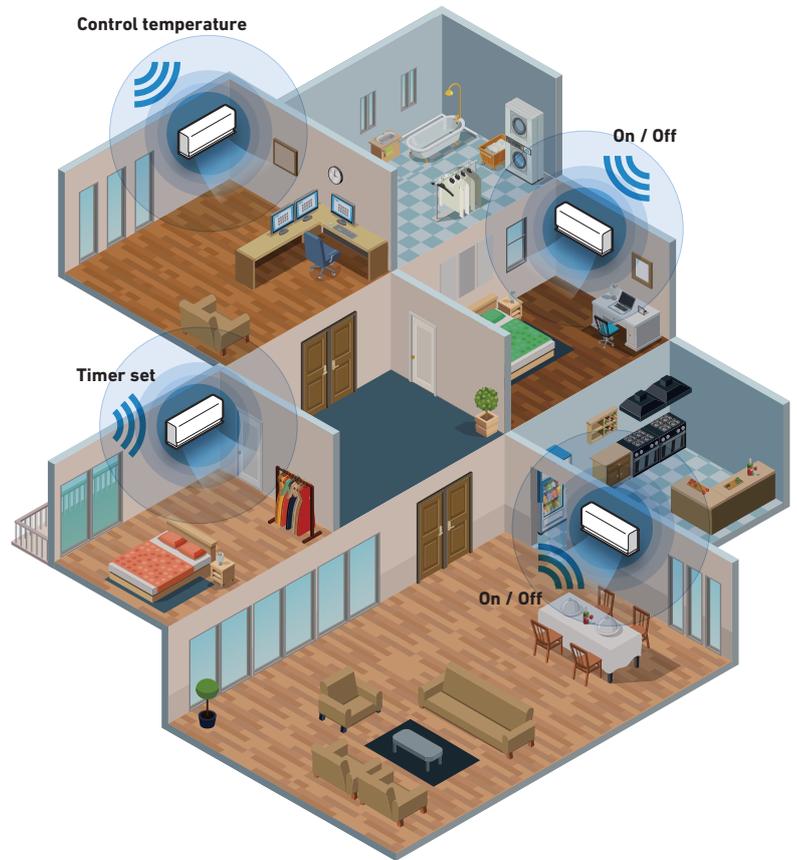

Wireless LAN Built-in model

Wireless Control System is equipped as standard



ZTL-W



ZSX-WF



ZS-WF



ZR-WF



Applicable products

Built-in

- 1 SRK-ZSX -WF/-WFB/-WFT
- 2 SRK-ZR -WF
- 3 SRK-ZS -WF/-WFB/-WFT
- 4 SRK-ZTL -W

Optional

- 1 SRK-ZSX -W/-WB/-WT/-S
- 2 SRK-ZR -W/-S
- 3 SRK-ZS -W/-WB/-WT
- 4 SRK-ZS -S/-SB/-ST

You can control the air conditioner at home or on the go by installing Smart M-Air app on your smartphone or tablet.



Search for "Smart M-Air" from the GooglePlay™ store for Android™ and AppStore for iPhone.



Application compatible model: Android™ OS 8-12 smartphones and tablets, iPhone for iOS 12-15

Functions

- 1 Turn ON/OFF
- 2 Change operation mode (Cool, Heat, Dry, Auto)
- 3 Control temperature
- 4 Set Timers
- 5 Favourite setting

Notification Function

- 1 Shut-off reminder alert
- 2 A notification will be sent to your smart device if the air conditioner is accidentally left running
- 3 Hi temp / low temp alert
- 4 Watching function



Weekly Timer

Timers can be set for different days of the week. They can also be set from the calendar.



Home Leave Mode

Heating / Cooling operation is automatically turned on when the room temperature is lower or higher than the set temperature.



Vacant Property Mode

Temperature can be set as follows:
Cooling 31°C to 33°C (interval 1°C),
Heating 10°C to 17°C (interval 1°C)
Only "Cool" and "Heat" operation modes can be selected.



Electricity Bill Graph

Displays an electricity bill by month on a graph. You can also set the electricity unit cost.

System configuration

Smartphone
Tablet



Internet



Router



Model :WF-RAC

*For the units that does not include wireless LAN the function could be used by adopting an option (WF-RAC)

*SC-BIKN2-E cannot be used simultaneously for system configuration.

Wireless Adaptors

airconwithme

Model :INAWMMHI0011000

EU/EEA market only

Please access the followings for details.

URL <http://www.airconwithme.com>

email info@airconwithme.com

* These are developed by HMS Industrial Networks.



*Android is a trademark of Google LLC. IOS is a registered trademark of Cisco in the U.S. and other countries and is used under license.