


INVERTER HEAT PUMP MODEL

SRR-ZM

Ceiling Concealed type

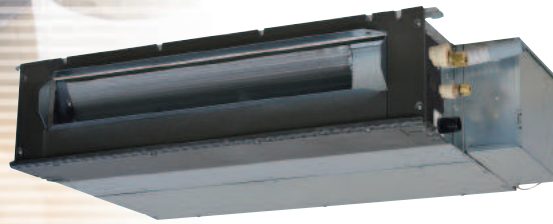

SRR25ZM-S, SRR35ZM-S



Standard equipment



SRR25/35ZM can be selected for use as indoor units in the combination with SCM Multi system outdoor unit.

Thin design

Height : 230 → 200mm



Current Model


New Model




SRC25ZMX-S, SRC35ZMX-S

OPTION

Item	Contents	Option No.
Bottom air inlet kit	①+②	UT-BAT1EF

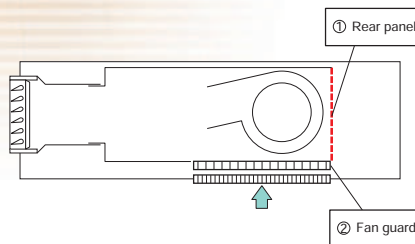

Refrigerant pipe length



SRR25ZM-S
SRR35ZM-S

FUNCTION



Comfortable Functions



Convenient & Economy Functions



Maintenance & Prevention Functions



Others



SPECIFICATIONS

Indoor unit				SRR25ZM-S		SRR35ZM-S		
Outdoor unit				SRC25ZMX-S		SRC35ZMX-S		
Power source				1 Phase, 220 - 240V, 50Hz				
Nominal cooling capacity (Min~Max)			kW	2.5 (1.0 ~ 3.3)		3.5 (1.0 ~ 3.9)		
Nominal heating capacity (Min~Max)			kW	3.4 (1.4 ~ 4.8)		4.2 (1.5 ~ 5.2)		
Power consumption		Cooling/Heating	kW	0.570 / 0.750		0.980 / 1.030		
EER/COP		Cooling/Heating		4.39 / 4.53		3.57 / 4.08		
Inrush current		220/230/240 V	A	3.9 / 3.7 / 3.6		5.0 / 4.8 / 4.6		
Max. running current				8		8		
* Sound power level	Indoor	Cooling/Heating	dB(A)	56 / 59		57 / 60		
	Outdoor	Cooling/Heating		60 / 60		62 / 62		
* Sound pressure level	Indoor	Cooling (Hi/Me/Lo/Ulo)		m³/min	37 / 33 / 30 / 24		38 / 34 / 31 / 25	
	Indoor	Heating (Hi/Me/Lo/Ulo)			40 / 37 / 34 / 28		41 / 38 / 35 / 29	
Air flow	Outdoor	Cooling/Heating	m³/min		47 / 47		50 / 50	
	Indoor	Cooling (Hi/Me/Lo/Ulo)			9.5 / 8.0 / 6.5 / 4.5		10.0 / 8.5 / 7.0 / 5.0	
		Heating (Hi/Me/Lo/Ulo)		10.0 / 9.0 / 8.0 / 6.0		10.5 / 9.5 / 8.5 / 6.5		
		Outdoor		Cooling/Heating	29.5 / 27.0		32.5 / 29.5	
Exterior dimensions	Indoor	HeightxWidthxDepth	mm	200 x 750 x 500				
	Outdoor			595 x 780(+62) x 290				
Net weight		Indoor / Outdoor	kg	20.5 / 35				
Ref.piping size		Liquid/Gas	ø mm	6.35(1/4") / 9.52(3/8")				
Refrigerant line (one way) length			m	Max. 15				
Vertical height differences		Outdoor is higher/lower	m	Max. 10 / Max.10				
Outdoor operating temperature range	Cooling	Heating	°C	-15~46				
	Heating			-15~21				
Air filter				Standard equipment				

The data are measured under the following conditions(ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
* Indicates the value in an anechoic chamber.During operation these values are somewhat higher due to ambient conditions.